

宗申动力 ZONG SHEN POWER

GB680 BOM No. : 1T4JQG680	
GB680	
GB680	
V01 2018-12-26	
	N


Appearance	GB680 Engine Specifications	
	Displacement (cc)	**679**
	Bore × stroke (mm)	**78×71**
	Oil quantity (cc)	**800~1500**
	Recommended oil	**10W-30**
	Fuel tank volume (cc)	**N/A**
	Starting System	**12V E-START**
	Ambient temperature（℃）	**5-40**
	Operation counts	**≤3**
	Idle speed (r/min)	**1400**
	Start idle (r/min)	**1400**
	Idle speed control	**Idle screw**
	Rated power (kW/rpm)	**14.5/3600**
	Speed control power(kW/r)	**14.5/3350**
	Max torque (N • m/rpm)	**42/2600**
	Fuel type	**92#**
	Net weight（kg）	**47**
	Certification	**EC(V)**
	Endurance time（h）	**500**
	Filter configuration	**PAPER**
	Adjust Speed type	**Manual machinery control**
	Choke control	**MANUAL CHOKE**
	Exhaust direction	**SIDE**
	Pulling direction	**/**
	Fuel switch	**/**
	Flameout method	**/**
	Oil alarm	**Y**
	PTO	**00#**
	Charging coil	**DC12V10W**
	Component special status confirmation	**Y**
	Application	**General purpose**
	Main parameters of the terminal (customer fill in)	
	Water pressure (psi)	
	Effluent flow (GPM)	
	Working speed (r/min)	
	Idle speed	
	start at idle speed	

Machine and side cover installation size

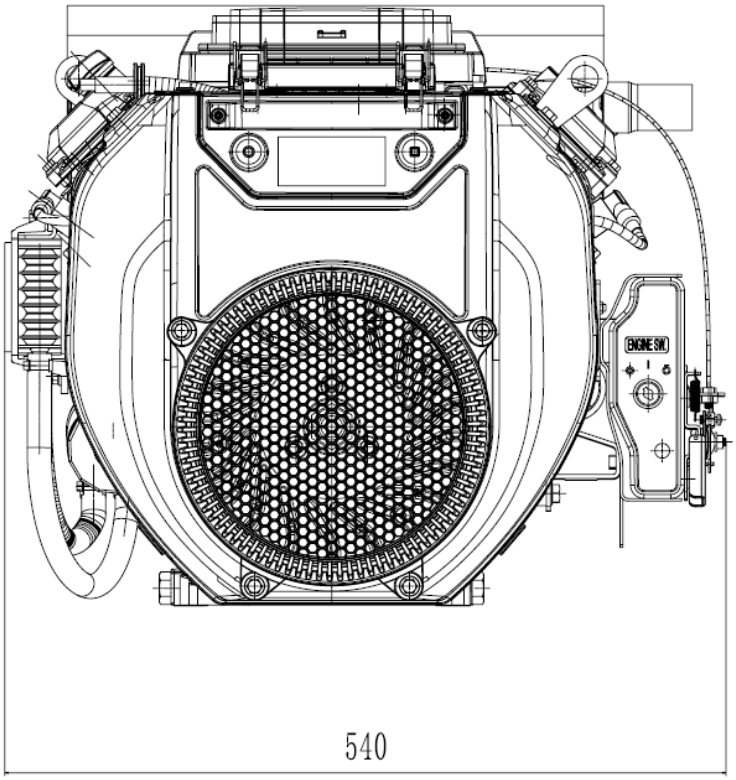


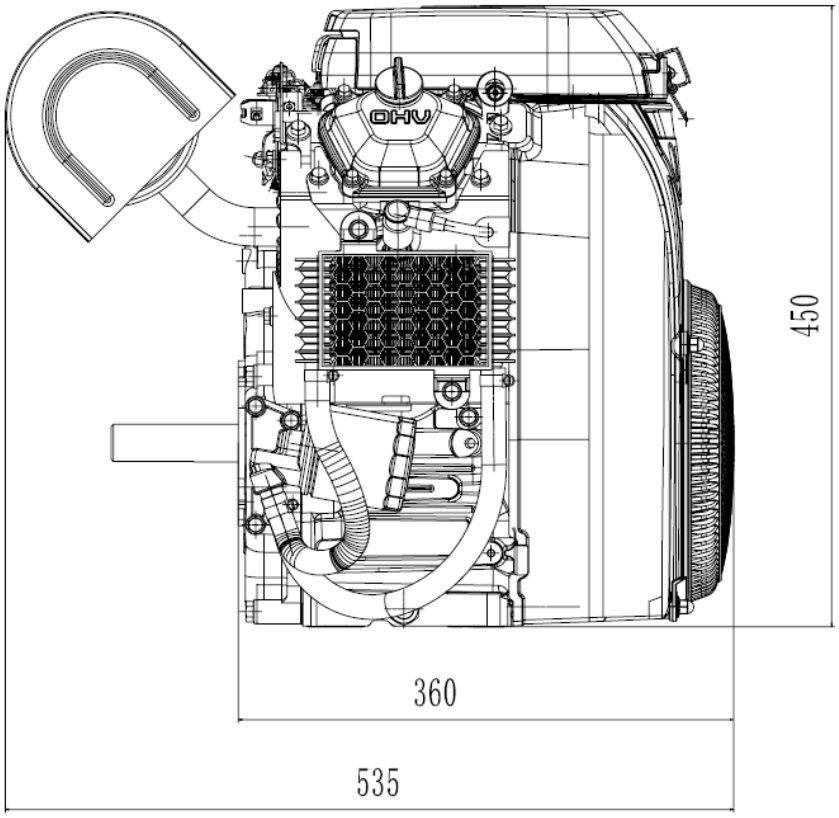

曲轴边盖安装尺寸

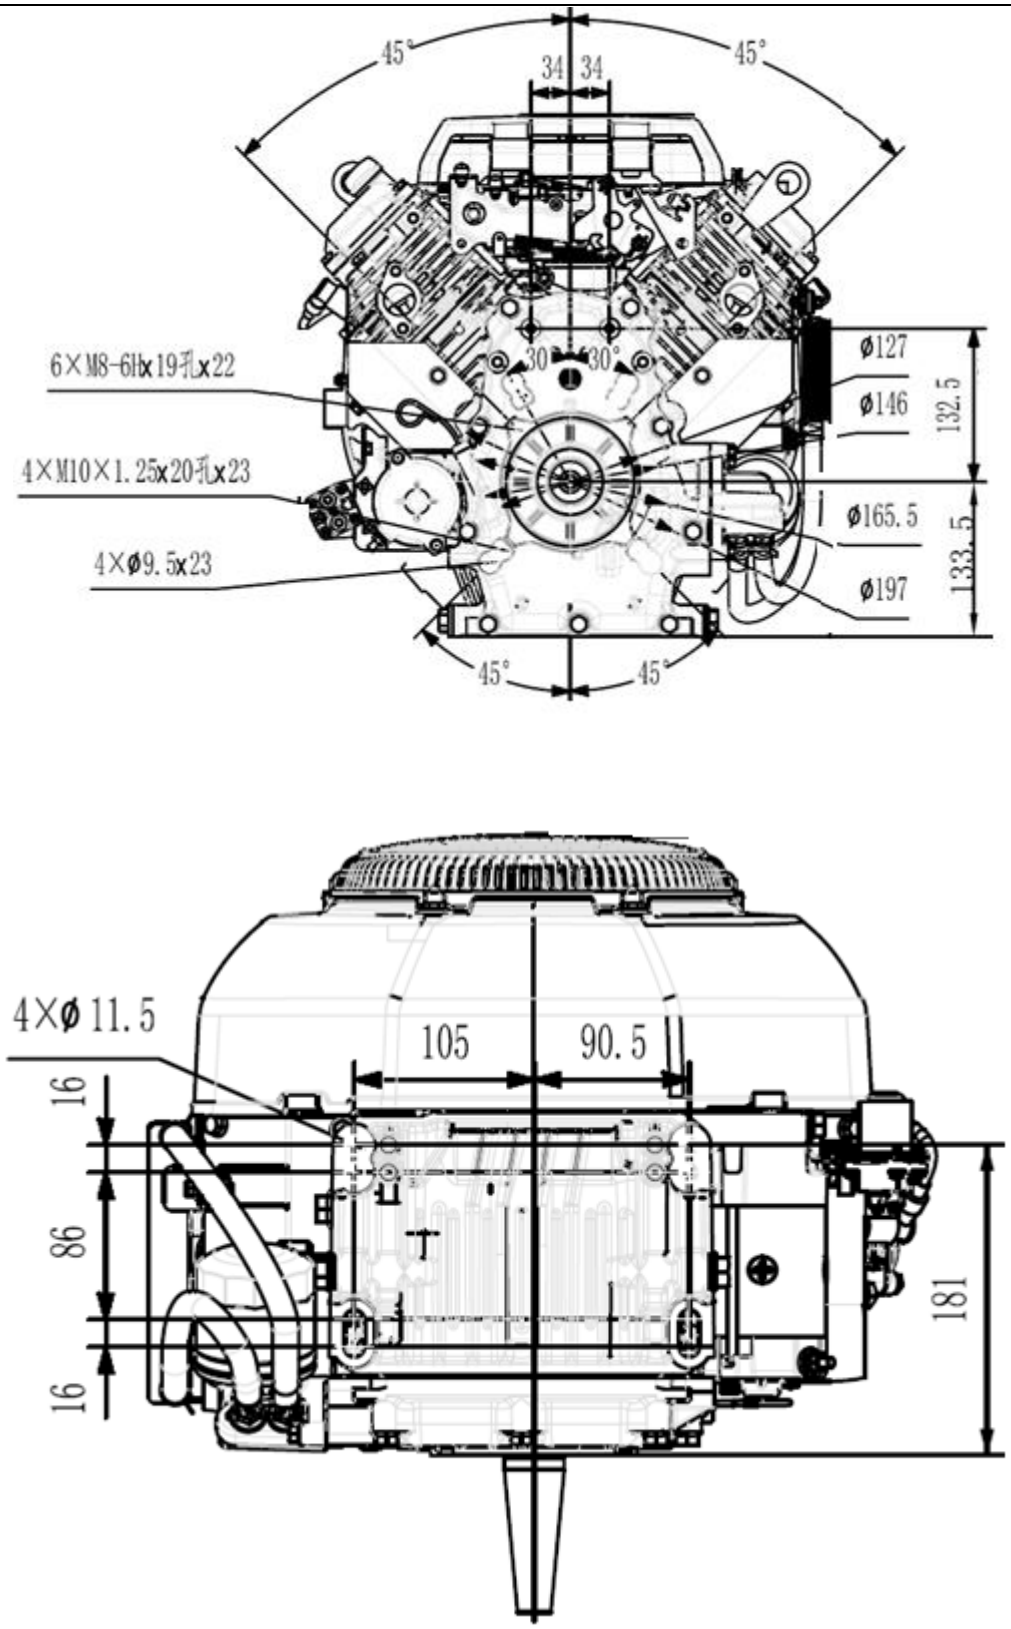

PTO output mounting size

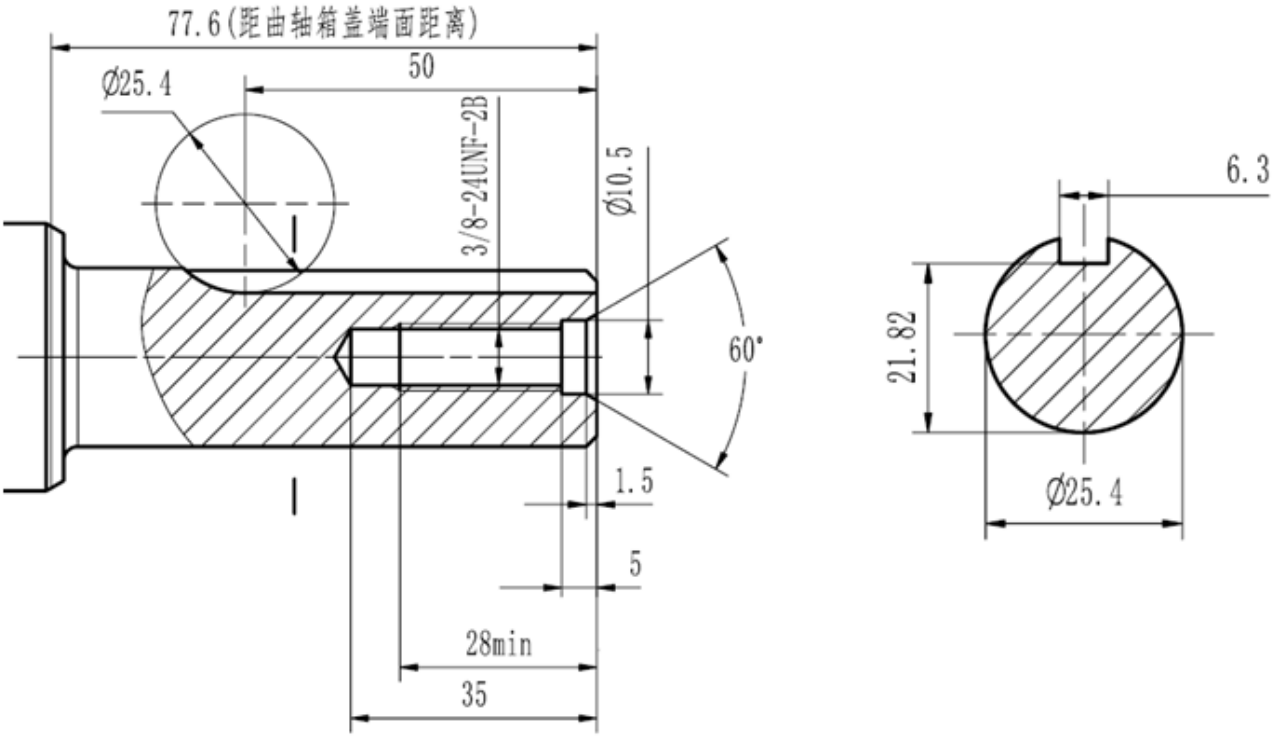

包装信息：	

备注（客户其他特殊要求）:

1、

2、

3、